

RoHS Compliant

E197851



Features

- High sensitivity
- Low cost
- Conforms to FCC part 68
- Clearance more than 1.2mm between coil and contacts
- Creepage more than 1.9mm between coil and contacts
- Bifurcated contacts for high reliability

Contact Data

Contact Arrangement	2C = DPDT Bifurcated Contacts	
Contact Rating	2A @ 24VDC	
	1A @ 120VAC	
Contact Material	AgNi + Au Clad	
Contact Resistance	≤ 50 milliohms initial	

Maximum Switching Power	48W, 120VA		
Maximum Switching Voltage	250VAC, 100VDC		
Maximum Switching Current	2A		

Coil Data

1	oltage CC	Coil Resistance Ω +/- 10%			Pick Up Voltage VDC (max)	Release Voltage VDC (min)	Coil Power W	Operate Time ms	Release Time ms	
Rated	Max	.15W	.20W	.36W	.45W	75% of rated voltage	10% of rated voltage			
3	3.9	60	45	25	20	2.25	0.3	.15 .20 .36 .45	6	4
5	6.5	167	125	56	56	3.75	0.5			
6	7.8	240	180	70	80	4.50	0.6			
9	11.7	540	405	100	180	6.75	0.9			
12	15.6	960	720	400	320	9.00	1.2			
24	31.2	n/a	2880	1600	1280	18.00	2.4			
48	62.4	n/a	n/a	6400	5100	36.00	4.8			

General Data

Electrical Life @ rated load	100K cycles, typical		
Mechanical Life	10M cycles, typical		
Insulation Resistance	100M Ω min. @ 500VDC		
Dielectric Strength, Coil to Contact	1000V rms min. @ sea level		
Contact to Contact	500V rms min. @ sea level		
Shock Resistance	100m/s ² for 11 ms		
Vibration Resistance	1.5mm double amplitude 10~40Hz		
Terminal (Copper Alloy) Strength	5N		
Operating Temperature	-40°C to +85°C		
Storage Temperature	-40°C to +85°C		
Solderability	260°C for 5 s		
Weight	5g		


Caution

- 1. The use of any coil voltage less than the rated coil voltage may compromise the operation of the relay.
- 2. Pickup and release voltages are for test purposes only and are not to be used as design criteria.

www.citrelay.com phone - 763.535.2339 fax - 763.535.2194




Ordering Information

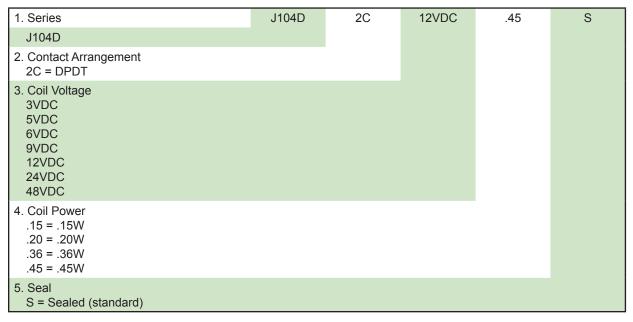



Dimensions

Units = mm

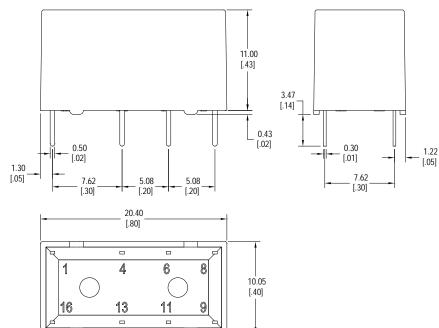

Schematic & PC Layout Bottom View





Dimensions shown in mm. Dimensions are shown for reference purposes only.