

SPECIFICATIONS

| Electrical Ratings | 25mA @ 50VDC | |
|-----------------------|--------------------------|--|
| Electrical Life | 1,000,000 cycles typical | |
| Contact Resistance | < 25 mΩ initial | |
| Actuation Force | 150 +/- 50gF | |
| Dielectric Strength | 1500Vrms min | |
| Insulation Resistance | > 100MΩ min | |
| Operating Temperature | -40°C to 85°C | |
| Storage Temperature | -40°C to 85°C | |

MATERIALS ←RoHS COMPLIANT


| Сар | ABS |
|-----------|---------------------------------------|
| Housing | 6/6 Nylon |
| Contacts | Copper Alloy, Gold over Nickel Plated |
| Terminals | Copper Alloy, Silver Plated |



ORDERING INFORMATION


| | 1111 | | | | |
|---|---|------------|-------|---|--------------|
| 1. Series: NC | NC | | Α | 3 | |
| 2. Cover Style: A B C D E | | | | | |
| 3. Cover Color: 1 = White 2 = Black 3 = Red 4 = Yellow 5 = Green | | | | | |
| 4. Caps: | 046 | 007 | Сар | Colors: | |
| Blank = No Cap C11 C12 C13 C14 C15* | C16 C17* C18 C19 C22 C26 | C27 C28 | ** Ca | e Cap Options for color av ps available with C & E ac 5 & C17 fit only "E" actuat | tuators only |

DIMENSIONS

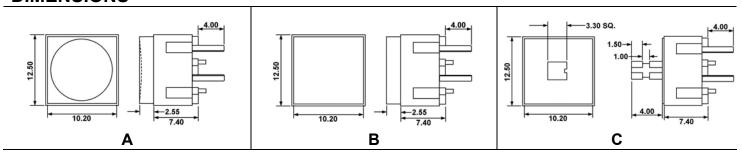





DIMENSIONS

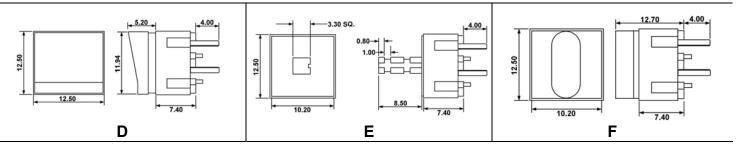



SCHEMATIC & PC LAYOUT






CAP OPTIONS ← Only available with C & E cover styles








Contact Factory for other available colors


C13_ 1 = White, 2 = Black, 3 = Red, 9 = Gray Contact Factory for other available colors



C14 1 = White, 2 = Black, 3 = Red, 9 = Gray Contact Factory for other available colors




C15_ For "E" actuator only 2 = Black, 0 = Clear Contact Factory for other available colors



 $1 = White, 2 = Black, \overline{3} = Red, 7 = Blue$ Contact Factory for other available colors











CAP OPTIONS ← Only available with C & E cover styles

