



## Features

- High sensitivity, super light weight
- Conforms to FCC part 68
- PC board mounting
- Available bifurcated contacts for high reliability

## Contact Data

	J104A & J104B - Bifurcated Contacts Standard Version	J104C - Bifurcated Contacts Low Cost Version
Contact Arrangement	2C = DPDT	2C = DPDT
Contact Rating	2A @ 30VDC, Resistive 3A @ 30VDC N.O., Resistive .6A @ 125VAC, Resistive	1A @ 24VDC, Resistive 1A @ 125VAC, Resistive
Contact Resistance	< 50 milliohms initial	< 50 milliohms initial
Contact Material	AgNi + Au clad	Ag
Maximum Switching Power	60W, 75VA	24W, 125VA
Maximum Switching Voltage	250VAC, 220VDC	250VAC, 220VDC
Maximum Switching Current	3A	3A

## Coil Data

Coil Voltage VDC		Coil Resistance Ω +/- 10%						Pick Up Voltage VDC (max) 75% of rated voltage	Release Voltage VDC (min) 10% of rated voltage	Coil Power W	Operate Time ms	Release Time ms
Rated	Max	.15W	.20W	.36W	.40W	.51W	.55W					
3	3.9	60	45	25	23	17.6	16	2.25	.3	.15 .20 .36 .40 .51 .55	4.5	1.5
5	6.5	167	125	56	63	39.7	45	3.75	.5			
9	11.7	540	405	100	203	70.6	140	6.75	.9			
12	15.6	960	720	400	360	282	280	9.00	1.2			
24	31.2	N/A	2880	1600	1440	1129	1070	18.00	1.2			
48	62.4	N/A	11.5K	N/A	5760	4518	3900	36.00	4.8			

## General Data

Electrical Life @ rated load	500K cycles, typical	
Mechanical Life	100M cycles, typical	
Insulation Resistance	100M Ω min. @ 500VDC	
Dielectric Strength	J104A & J104B	J104C
	Coil to Contact	1500V rms min.
Contact to Contact	1000V rms min.	500V rms min.
Shock Resistance	100m/s <sup>2</sup> for 11 ms	
Vibration Resistance	1.50mm double amplitude 10~40Hz	
Terminal (Copper Alloy) Strength	5N	
Operating Temperature	-40°C to +85°C	
Storage Temperature	-40°C to +155°C	
Solderability	260°C for 5 s	
Weight	4.5g	

### Caution

1. The use of any coil voltage less than the rated coil voltage may compromise the operation of the relay.


# J104

## Ordering Information


1. Series	J104A	2C	12VDC	.55	S
J104A **.40W, .55W coil power only J104B **.15W, .20W coil power only J104C **.20W, .36W, .51W coil power only (only available on 5, 12 & 24 VDC coil)					
2. Contact Arrangement	2C = DPDT				
3. Coil Voltage	3VDC 5VDC 9VDC 12VDC 24VDC **not available with .15W coil power 48VDC **not available with .15W or .36W coil power				
4. Coil Power	J104A	J104B	J104C		
	.40 = .40W	.15 = .15W	.20 = .20W		
	.55 = .55W	.20 = .20W	.36 = .36W		
			.51 = .51W		
5. Sealed	S = Sealed (standard)				

## Dimensions

Units = mm

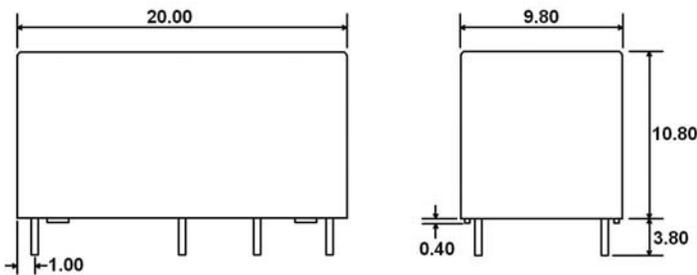

J104A & J104B

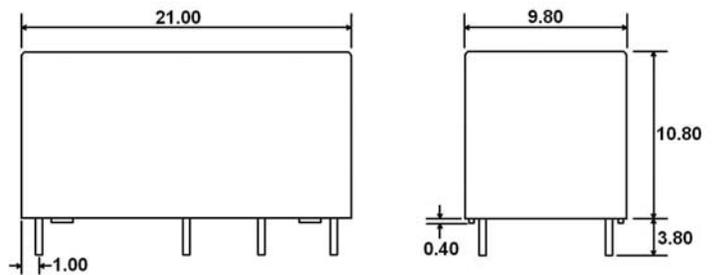

J104C

## Schematics & PC Layouts

Bottom Views

